


INTELLIGENT METER

Model : EM-9200

ISO-9001, CE, IEC1010

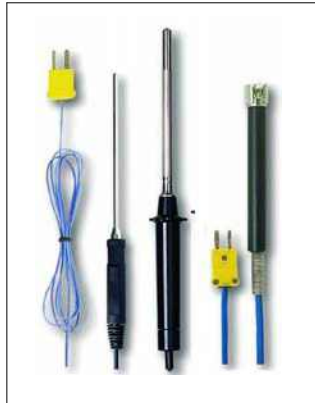

Type K TEMP. PROBE
TP-01, TP-02A, TP-03, TP-04



SOUND ADAPTER, SL-407



HUMIDITY PROBE, HD-200PRH



ANEMOMETER PROBE, HD-200PAL



LIGHT PROBE, HD-200PLX



LUTRON ELECTRONIC

The Art of Measurement

INTELLIGENT METER

Model : EM-9200

<p>INTELLIGENT METER Model : EM-9200</p>	<ul style="list-style-type: none"> * Meter build in the type K/J thermometer with " plug and play " function. * Type K (-50.0 to 1300.0 °C), Type J (-50.0 to 1100.0 °C) * Be plugged with optional " plug & play " probes : HD-200PRH, HD-200PAL, HD-200PLX, SL-407 to be used a professional Humidity meter. Anemometer, Light meter, Sound level meter. * RS-232, data logger, Hold, Memory record, °C/°F, 0.1degree.
<p>TYPE K TEMPERATURE PROBE</p>	<p>TP-01 : -40 to 250 °C, Naked-bead. TP-02A : -50 to 900 °C, 3.2 mm Dia. x 10 cm. TP-03 : -50 to 1000 °C, 8 mm Dia. x 10 cm. TP-04 : -50 to 400 °C, surface probe.</p>
<p>HUMIDITY PROBE Model : HD-200PRH</p>	<ul style="list-style-type: none"> * Plug in the HD-200PRH to be used as a professional Humidity/Temp. meter. * Humidity : 10 to 95 %RH, 0.1 %RH. * Temperature : 0 to 50.0 °C x 0.1 °C. 32 to 122 °F x 0.1 °F.
<p>ANEMOMETER PROBE Model : HD-200PAL</p>	<ul style="list-style-type: none"> * Plug in the HD-200PAM to be used as a professional Anemometer. * Range : 0.4 to 25.0 m/s x 0.1 m/s. * Unit : m/s, ft/min., km/h. mile/h, knots, °C/°F.
<p>LIGHT PROBE Model : HD-200PLX</p>	<ul style="list-style-type: none"> * Plug in the HD-200PAM to be used as a professional Light meter. * Lux : 0 to 20,000 Lux, auto range. * Foot-candle : 0 to 2,000 Fc, auto range. * Unit : Lux, Foot-candle (Fc). * Plug in the SL-407 to be used as
<p>SOUND ADAPTER Model : SL-407</p>	<p>a professional sound level meter.</p> <ul style="list-style-type: none"> * Frequency and the weighting meet IEC 61672, type 2. * A frequency weighting. * Range : 3 ranges, 30 to 130 dB. * External calibration adj. VR.

* Appearance and specifications listed in this brochure are subject to change without notice.

0809-EM9200